

COMPACT AND EFFICIENT



9E1H

- ◆ HDMI & VGA input
- ◆ Cable Management
- ◆ Low Blue Mode & Flicker Free for eye care
- ◆ VESA Mount



LOW BLUE MODE



FLICKER FREE



CLEAR VISION

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE vision at Heart



▶ FEATURES



Multimedia-Ready with HDMI Input

HDMI (High-Definition Multimedia Interface) is the digital video and sound standard for connecting the latest consumer electronics like Blu-ray players and game consoles.



SCREEN +

Screen+

The bundled Screen+ software splits the PC workspace into four self-contained panes to group application windows for easier viewing. Screen+ also supports multiple monitors.



AOC MENU

i-Menu

Included PC software allows the user to change the OSD settings using their mouse.



E-SAVER

e-Saver


Software enables the user to set a low power configuration of the monitor when the PC is in screen saving, PC off, and user absence. User can choose the time to turn the monitor off, to save power consumption.



LOW BLUE MODE

Low Blue Mode

AOC Low Blue Mode filters harmful short-wave blue light, with 4 levels that suit different viewing situations.



FLICKER FREE

Flicker Free Backlight Technology

Most LED monitors use PWM (pulse width modulation) to control brightness; the pulsing creates flicker that may cause discomfort, headaches and eye strain, especially in low-light environments. Flicker Free technology uses a smooth DC (direct current) backlight system.



Ordinary Monitor


AOC Monitor



CLEAR VISION

Clear Vision

The image performance engine can upscale Standard Definition (SD) sources to High Definition (HD) for sharper, more vivid viewing.

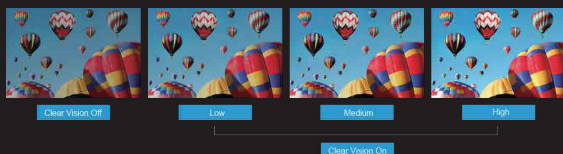

Clear Vision Off

Low

Medium

High

Clear Vision On

▶ SPECIFICATIONS

| Model Name | 9E1H |
|-----------------------------|--|
| Panel Size | 18.5" / 470mm |
| Pixel Pitch (mm) | 0.3 (H) × 0.3 (V) |
| Effective Viewing Area (mm) | 409.8 (H) × 230.4 (V) |
| Brightness (typical) | 200 cd/m ² |
| Contrast Ratio | 600:1 (Typical) 20 Million : 1 (DCR) |
| Smart Response | 5ms (GtG) |
| Viewing Angle | 180° (H) / 130° (V) (CR > 10) |
| Color Gamut | NTSC 78% (CIE1976) / sRGB 100% (CIE1931) |
| Optimum Resolution | 1366 × 768 @ 60Hz |
| Display Colors | 16.7 Million |
| Signal Input | VGA, HDMI 1.4 |
| Power Supply | 100 - 240V ~ 1.5A, 50 / 60Hz |
| Smart Power Mode: Typical | 11W |
| Built-in Speakers | no |
| Regulatory Approvals | BSMI |
| Wall-Mount | 100mm x 100mm |
| Cabinet Color | Black |
| Adjustable Stand | Tilt: -3.5° ~ 21.5° |
| Product with Stand (mm) | 374.9 (H) × 439.6 (W) × 199.4 (D) |
| Packaging (mm) | 364 (H) × 500 (W) × 139 (D) |
| Weight (Net /Gross) kg | 2.1 / 2.98 |

Design and Specifications are subject to change without notice.